



STANDARD WR SINGLE FRAME
& GATE. FOR DETAILS SEE
STDS. MD 374.02 & MD 374.03

5/8" ϕ ANCHOR BOLT, 4 PER FRAME
(FOR DETAILS SEE STD. MD 374.02)

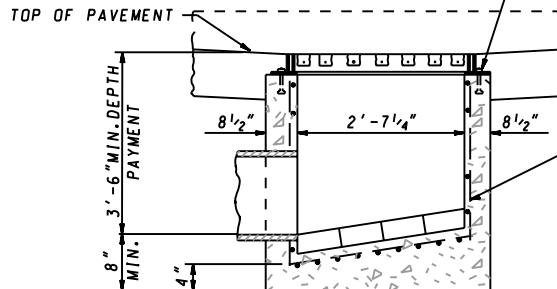

REINFOCMENT:
NO. 4 ϕ DEFORMED
BARS @ 6" c/c 2 WAYS
2" COVER

SECTION A-A

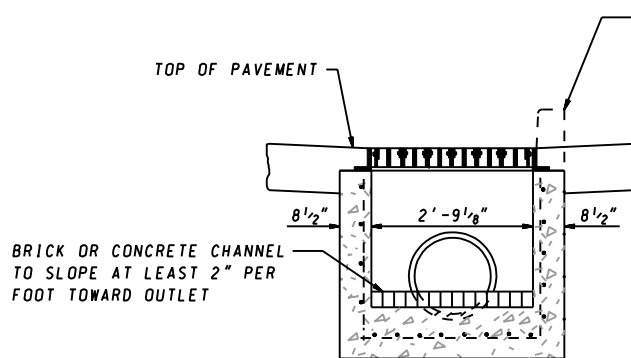

POSITION OF CURB WHEN REQUIRED- TO BE
PAID FOR PER LINEAR FEET OF STANDARD CURB.

NOTE

INLET SHALL BE CONSTRUCTED OF REINFORCED
CONCRETE (MIX NO. 2). SIZE, TYPE AND DIRECTION
OF OUTLET PIPE WILL VARY TO SUIT EACH CASE
AND THE INVERT WILL BE ALTERED ACCORDINGLY.
BRICK FOR MASONRY, TO COMPLY WITH THE
LATEST S.H.A. SPECIFICATIONS. IF LADDER RUNGS
ARE REQUIRED SEE STANDARD MD 383.91
OR MD 383.92.

SECTION B-B

SPECIFICATION 305	CATEGORY CODE ITEMS										
APPROVED <i>Kirk G. McCall</i> DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT											
SHA State Highway Administration	<table> <tr> <td>APPROVAL • SHA REVISIONS</td><td>APPROVAL • FEDERAL HIGHWAY ADMINISTRATION</td></tr> <tr> <td>APPROVAL 3-5-75</td><td>APPROVAL 5-22-75</td></tr> <tr> <td>REVISED 10-1-01</td><td>REVISED 2-24-88</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> </table>	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	APPROVAL 3-5-75	APPROVAL 5-22-75	REVISED 10-1-01	REVISED 2-24-88	REVISED	REVISED	REVISED	REVISED
APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION										
APPROVAL 3-5-75	APPROVAL 5-22-75										
REVISED 10-1-01	REVISED 2-24-88										
REVISED	REVISED										
REVISED	REVISED										

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

SINGLE WR INLET

STANDARD NO. MD 374.06